

DRA series ROTARY CYLINDER

DRA



Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRA-10	4	90°, 180° (270°)	Rod with section	1.5~7 (150~700)	0.1
DRA-15	5				0.4
DRA-20	6				0.8
DRA-30	8				1.8
DRA-40	10				3.8
DRA-50	12		5		
DRA-63	15		10		
DRA-80	17		18		
DRA-100	25		35		
					Rod with keyway

Note : 1. Theoretical Thrust : When air supply to be 5 Kgf/cm².
2. 1 N · m = 0.102 kgf · m

DRB series ROTARY CYLINDER


DRB



Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRB-10	10	90° 180°	Flange type with index (Precision type)	1.5~7 (150~700)	0.14
DRB-15	15				0.38
DRB-20	20				0.78
DRB-30	30				1.8

DRC, DRD series ROTARY CYLINDER

DRC, DRD

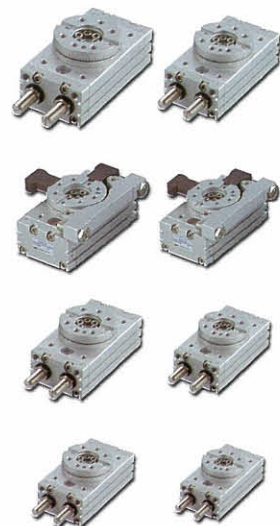

Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRC-03	10	180°	Flange type with index	1.5~7 (150~700)	0.3
DRC-07	12				0.6
DRC-10	15				1.5
DRC-20	18				2.2
DRC-30	20				3.2
DRC-50	25				5.5
DRC-70	28				7.5
DRC-100	32				9.8
DRC-200	40				19
DRC-300	50				31
DRC-500	63	49			
DRD-10	15	90°, 180°	Flange type with index	1.5~7 (150~700)	1.5
DRD-20	18				2.2
DRD-30	20				3.2
DRD-50	25				5.5
DRD-70	28				7.5
DRD-100	32				9.8

Note : 1. Theoretical Thrust : When air supply to be 5 Kgf/cm².
2. 1 N · m = 0.102 kgf · m

DRE series 3 POSITIONS - ROTARY CYLINDER

DRE



Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRE-10	15	180°	Flange type with index (Precision type)	1.5~7 (150~700)	1.5
DRE-20	18				2.2
DRE-30	20				3.2
DRE-50	25				5.5

DRF series ROTARY CYLINDER

DRF



Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRF-5	16	90°, 180°	Model : Standard : Rod with keyway RTP-5 : Rod with section Rod type Standard : Single rod Rod-2D : Double rod	1.5~7 (150~700)	0.4
DRF-10	20				0.9
DRF-20	25				1.9
DRF-30	30				2.9

Note : 1. Theoretical Thrust : When air supply to be 5 Kgf/cm².
2. 1 N · m = 0.102 kgf · m

DRG series ROTARY CYLINDER

DRG



Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRG-40	40	90°, 180°	Standard : Rod with keyway (Outer ditch) F : Female (Inner ditch)	1.5~7 (150~700)	10
DRG-63	63				40
DRG-80	80				60

Note : 1. Theoretical Thrust : When air supply to be 5 Kgf/cm².
2. 1 N · m = 0.102 kgf · m

DRH series HYDRAULIC CYLINDER

DRH



Model	Rod Size Ø mm	Rotation Angle	Rotary Mounting Method	Pressure Range Kgf/cm ² (Kpa)	Torque N · m
DRH-32	24	90°, 180°	Double acting	35 (3500)	12
DRH-40	28				20

Note : 1. Theoretical Thrust : When air supply to be 5 Kgf/cm².
2. 1 N · m = 0.102 kgf · m

AIRINN products
Related Calculation
Common Caution
Air unit
Valve
Cylinder
Gripper
Vacuum Equipment
Fitting
Accessories
Assembly pick and place robot